

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 June 2001 (14.06.2001)

PCT

(10) International Publication Number
WO 01/42775 A1

(51) International Patent Classification⁷: G01N 27/12

Uk [KR/KR]; Hanjin APT., 701-1303, Chongja-dong, Pundang-gu, Songnam-shi, Kyonggi-do 463-010 (KR).

(21) International Application Number: PCT/KR00/01440

(74) Agents: KIM, Yong, In et al.; 15th Floor, Yo Sam Bldg., 648-23, Yeoksam-dong, Kangnam-ku, Seoul 135-080 (KR).

(22) International Filing Date:
12 December 2000 (12.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1999/57196 13 December 1999 (13.12.1999) KR

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): LG ELECTRONICS INC. [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-010 (KR).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): LEE, Don, Hee [KR/KR]; Samik APT., 1-1109, 572, Pisan-dong, Tongan-gu, Anyang-shi, Kyonggi-do 431-050 (KR). BU, Jong,

Published:
— With international search report.

[Continued on next page]

(54) Title: ABSOLUTE HUMIDITY SENSOR

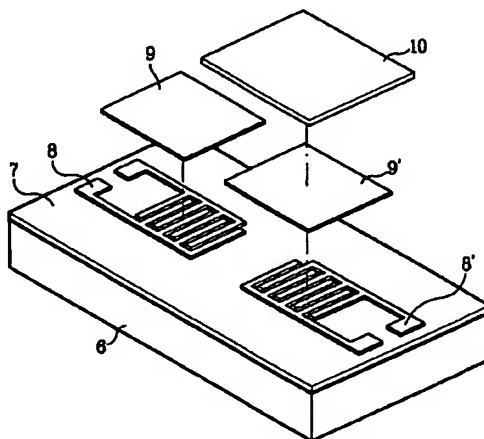

WO 01/42775 A1

(57) Abstract: An absolute humidity sensor for a microwave oven is disclosed. The absolute humidity sensor includes a silicon substrate, a humidity sensing element formed on a substrate, for detecting humidity exposed to the air, having a variable resistance value depending on the amount of the humidity, a temperature compensating element formed on the semiconductor, for compensating for the resistance value of the humidity sensing element, and a passivation film covered on the temperature compensating element, for shielding the humidity exposed to the air so as not to vary the resistance value of the temperature compensating element. The humidity sensing element and the temperature compensating element include an insulating film formed on the substrate, a humidity sensing film formed on the insulating film, for absorbing the humidity, and an electrode formed below the humidity sensing film or over/below the humidity sensing film. A polyimide thin film, which absorbs the humidity greater than a ceramic based humidity sensing material, is used as a humidity sensing material, and a silicon wafer is used as a substrate. Thus, an absolute humidity sensor susceptible to humidity can be fabricated and at the same time the sensor is integrated using a silicon process to facilitate its mass production.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR 00/01440

CLASSIFICATION OF SUBJECT MATTER

IPC⁷: G01N 27/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷: G01N 27/12, G01N 27/22, G01N 27/18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2194845 A (SHARP) 16 March 1988 (16.03.88)	1-3,5-7
Y	the whole document.	4,8,9
Y	WO 91/03734 A1 (AT & S) 21 March 1991 (21.03.91)	4
	abstract.	
Y	EP 021225 A1 (SHIBAURA DENSHI) 7 January 1981 (07.01.81)	8,9
	fig. 2.	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

16 March 2001 (16.03.2001)

Date of mailing of the international search report

30 March 2001 (30.03.2001)

Name and mailing address of the ISA/AT

Austrian Patent Office
Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

NARDAI

Telephone No. 1/53424/347

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 00/01440

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	A	021225		none		
GB	A1	2194845	16-03-1988	DE	A1 3724966	04-02-1988
GB	B2	2194845	24-10-1990	DE	C2 3724966	26-10-1989
				DE	C3 3724966	21-03-1996
				GB	A0 8717919	03-09-1987
				US	A 4928513	29-05-1990
				JP	A2 63145954	18-06-1988
				JP	A2 63263426	31-10-1988
				JP	B4 7095002	11-10-1995
				JP	A2 63289443	25-11-1988
				JP	A2 63293459	30-11-1988
WO	A1	9103734	21-03-1991	DE	C0 59010077	29-02-1996
				EP	A1 489825	17-06-1992
				EP	A1 489826	17-06-1992
				EP	B1 489826	17-01-1996
				FI	A0 920916	28-02-1992
				FI	A0 920917	28-02-1992
				FI	B1 100618	15-01-1998
				JP	T2 5505234	05-08-1993
				JP	T2 5506711	30-09-1993
				US	A 5348761	20-09-1994
				WO	A1 9103735	21-03-1991
				AT	A 571/90	15-07-1997
				AT	B 403527	25-03-1998

ABSOLUTE HUMIDITY SENSOR

Technical Field

The present invention relates to an absolute humidity sensor, and
5 more particularly, to an absolute humidity sensor for a microwave oven.

Background Art

Generally, a humidity sensor is used for various purposes, for
10 example, in a hygrometer, a humidity sensor for cooking of food in a
microwave oven, and the like. Examples of currently used humidity sensors
include a capacitance type humidity sensor, a relative humidity sensor,
and an absolute humidity sensor. The capacitance type humidity sensor is
based on variation of dielectric constants by hygroscopic property of an
15 organic material such as polyimide. The relative humidity sensor is based
on resistance variation of a semiconductor ceramic such as MgCr_2O_4 . The
absolute humidity sensor is based on a ceramic thermistor.

Of the humidity sensors, the absolute humidity sensor based on two
thermistors is widely used as a humidity sensor for cooking of food in
20 a microwave oven.

The absolute humidity sensor has an advantage in that it can stably
detect the humidity because it is not susceptible to variation of a
peripheral temperature.

The principles of sensing humidity of the absolute humidity sensor
25 in the microwave oven are based on resistance variation by temperature
variation of a thermistor as vapor generated from food during cooking of

food absorbs heat of the thermistor.

Fig. 1 shows a structure of a background art absolute humidity sensor. Referring to Fig. 1, two ceramic thermistors 1 and 2 coated with a passivation film such as a glass film are floating by being connected to a support pin 4 by a precious metal conductor 3 such as platinum. The ceramic thermistors 1 and 2 are packaged by a metal shield case 5 that isolates the two thermistors 1 and 2 from each other.

The thermistor 1 is exposed to the air to allow vapor to be in contact with a surface of the thermistor 1 by means of a fine hole of the metal shield case 5. The thermistor 1 is used as a sensing element. The other thermistor 2 is sealed in a dry N_2 by the metal shield case 5 so as not to be in contact with the vapor. The thermistor 2 is used as a reference element.

Therefore, if a bridge circuit consists of the two thermistors 1 and 2 and an external resistor, the vapor generated from food during cooking of food absorbs heat of the thermistor 1 exposed to the air. Thus, resistance variation occurs in only the exposed thermistor 1. In this case, output variation occurs due to a bias voltage, thereby detecting the humidity.

Since the background art humidity sensor uses an element as a ceramic thermistor, heat capacity is great and thus sensitivity is low. Also, response time is slow and the size of the sensor becomes greater.

Furthermore, the thermistor element is floating using the conductor 3 and the support pin 4 as shown in Fig. 1, and the conductor 3 and the pin 4 are spot-welded. For assembly, the reference element 2 should be sealed in a dry N_2 . For this reason, the fabrication process

steps are complicate and the number of the process steps increases. Also, the cost is expensive and mass production is disadvantageous.

Disclosure of the Invention

5 Accordingly, the present invention is directed to an absolute humidity sensor that substantially obviates one or more of the problems due to limitations and disadvantages of the background art.

 An object of the present invention is to provide an absolute humidity sensor having excellent humidity hygroscopic property.

10 Another object of the present invention is to provide an absolute humidity sensor having simple process steps to facilitate mass production.

 Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from
15 the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

 To achieve these and other advantages and in accordance with the
20 purpose of the present invention, as embodied and broadly described, an absolute humidity sensor according to the present invention includes a silicon substrate, a humidity sensing element formed on a substrate, for detecting humidity exposed to the air, having a variable resistance value depending on the amount of the humidity, a temperature compensating
25 element formed on the semiconductor, for compensating for the resistance value of the humidity sensing element, and a passivation film covered on

the temperature compensating element, for shielding the humidity exposed to the air so as not to vary the resistance value of the temperature compensating element.

In the preferred embodiment of the present invention, the humidity
5 sensing element and the temperature compensating element include an insulating film formed on the substrate, a humidity sensing film formed on the insulating film, for absorbing the humidity, and an electrode formed below the humidity sensing film or over/below the humidity sensing film.

10 The insulating film and the passivation film are formed of any one of SiO_2 , Si_3N_4 , and SiO_xN_y . The humidity sensing film is formed of polyimide annealed at a temperature of $200\sim 300^\circ\text{C}$. The electrode uses a comb electrode.

The absolute humidity sensor according to the present invention
15 further includes a printed circuit board joined with a lower portion of the silicon substrate, a wire which electrically connects electrodes of the humidity sensing element and the temperature compensating element with electrodes of the printed circuit board, and a metal shield case formed over the printed circuit board to cover an entire surface of the
20 printed circuit board including the humidity sensing element and the temperature compensating element.

In the preferred embodiment of the present invention, a polyimide thin film, which absorbs the humidity greater than a ceramic based humidity sensing material, is used as a humidity sensing material, and
25 a silicon wafer is used as a substrate. Thus, an absolute humidity sensor susceptible to humidity can be fabricated and at the same time the sensor

is integrated using a silicon process to facilitate its mass production.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

5

Brief Description of the Drawings

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

In the drawings:

Fig. 1 is a structural sectional view showing a background art of an absolute humidity sensor;

15 Figs. 2a and 2b are structural perspective views showing a resistance type absolute humidity sensor according to the present invention;

Figs. 3a and 3b are structural perspective views showing a capacitance type absolute humidity sensor according to the present invention;

20 Figs. 4a and 4b show a structure of an absolute humidity sensor package according to the present invention; and

Fig. 5 is a circuit diagram for detecting the humidity based on the resistance type absolute humidity sensor according to the present invention.

25

Best Mode for Carrying Out the Invention

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

5 First Embodiment

Figs. 2a and 2b are structural perspective views showing a resistance type absolute humidity sensor according to the present invention.

As shown in Fig. 2a, an insulating film 7 of SiO_2 , Si_3N_4 , or SiO_xN_y is formed on a silicon substrate 6. A metal film such as Al or Pt is deposited on the insulating film 7 and then patterned to form a pair of electrodes 8 and 8' in a comb shape.

Afterwards, a polyimide thin film is spin-coated on the electrode and then patterned to form a humidity sensing film 9 for a humidity sensing element and a humidity sensing film 9' for a temperature compensating element.

The polyimide is imidized at a temperature of about 200°C or greater. The polyimide has a thermal decomposition temperature of about $450\sim 500^\circ\text{C}$. Accordingly, the polyimide has excellent thermal stability.

20 Also, the polyimide has a hygroscopic property as follows.

An equilibrium value of an aqueous molecule absorbed into the polyimide at a room temperature under the ambient of a relative humidity ambient of 80% is about 2.3wt%. The polyimide absorbs humidity more than a ceramic based humidity sensing material. Moreover, a diffusion coefficient of the aqueous molecule within a polyimide thin film is approximately $5 \times 10^{-9} \text{cm}^2/\text{sec}$ at a room temperature. Accordingly, high

response time can be obtained.

The polyimide thin film has a compact film tissue when annealing is performed at a high temperature of about 300°C or greater. In this case, it is difficult to propagate the humidity into the film. To use the polyimide thin film as a humidity sensing element, the annealing process is preferably performed at a temperature between 200°C and 300°C to obtain high hygroscopic ratio of the polyimide film.

After the humidity sensing films 9 and 9' are formed, a ceramic thin film such as SiO₂, Si₃N₄, and SiO_xN_y is deposited on the humidity sensing film 9' for a temperature compensating element and then patterned, so that the humidity is not propagated into the humidity sensing film 9'. Thus, a passivation film 10 is formed.

In the resistance type absolute humidity sensor fabricated as above, it is noted that, as shown in Fig. 2b, the humidity sensing element and the temperature compensating element are formed on the same silicon substrate 6.

Second Embodiment

Figs. 3a and 3b are structural perspective views showing a capacitance type absolute humidity sensor according to the present invention.

As shown in Fig. 3a, an insulating film 12 of SiO₂, Si₃N₄, or SiO_xN_y is formed on a silicon substrate 11. A metal film such as Al or Pt is deposited on the insulating film 12 and then patterned to form a lower electrode 13 for a humidity sensing element and a lower electrode 13' for a temperature compensating element.

Afterwards, a polyimide thin film is spin-coated on the lower

electrodes 13 and 13' and then patterned to form a humidity sensing film 14 for a humidity sensing element and a humidity sensing film 14' for a temperature compensating element. Subsequently, an annealing process is performed at a temperature between 200°C and 300°C.

5 The metal film having the same material as that of the lower electrodes 13 and 13' is deposited on the polyimide humidity sensing films 14 and 14' and then patterned to form an upper electrode 15 for a humidity sensing element and an upper electrode 15' for a temperature compensating element in a comb shape. Thus, a parallel capacitor
10 structure is formed in such a manner that the polyimide humidity sensing film is formed between the upper and lower electrodes.

 Unlike the lower electrodes 13 and 13', the upper electrodes 15 and 15' are formed in a comb shape to allow an aqueous molecule to smoothly pass through the polyimide humidity sensing film, thereby partially
15 exposing the polyimide thin film.

 Accordingly, the vapor is directly in contact with the polyimide humidity sensing film exposed between the upper electrodes, so as to be propagated into the thin film.

 The polyimide has a relative dielectric constant of 3 to 4 at a room
20 temperature. Also, the polyimide has a dissipation factor value of 0.001~0.003 at the frequency of 1kHz. Accordingly, the polyimide has a stable dielectric property.

 In the present invention, since the polyimide humidity sensing film acts as a dielectric of a capacitor, dielectric mixtures having different
25 dielectric constants are formed within the polyimide thin film if the aqueous molecule having a relative dielectric constant of 80 is

propagated into the polyimide thin film.

Thus, the relative dielectric constant of the dielectric mixtures is varied depending on variation of the peripheral humidity, so that the humidity variation can be detected.

5 Finally, a ceramic thin film such as SiO_2 , Si_3N_4 , and SiO_xN_y is deposited on the humidity sensing film 14' for a temperature compensating element and the upper electrode 15' and then patterned, so that the humidity is not propagated into the humidity sensing film 14'. Thus, a passivation film 16 is formed.

10 In the capacitance type absolute humidity sensor fabricated as above, it is noted that, as shown in Fig. 3b, the humidity sensing element and the temperature compensating element are formed on the same silicon substrate 11.

Figs. 4a and 4b show a package structure of an absolute humidity
15 sensor according to the present invention, in which one example of the resistance type absolute according to the first embodiment of the present invention is shown.

As shown in Fig. 4a, an absolute humidity sensor element 19 provided with a humidity sensing element 18 and a temperature compensating element
20 18 as fabricated by the method of the first embodiment is joined with a printed circuit board 20. Electrodes 8 and 8' of the elements are wire-bonded to an electrode 21 of the printed circuit board 20. Afterwards, as shown in Fig. 4b, a shield wire 22 is connected to the printed circuit board 20. The shield wire 22 and the printed circuit board
25 20 are sealed with a metal shield case 23 having a hole to propagate the humidity thereinto. Thus, the package of the absolute humidity sensor is

completed.

Fig. 5 is a circuit diagram for detecting variation of the peripheral humidity based on the resistance type absolute humidity sensor according to the present invention. The circuit for detecting
5 variation of the peripheral humidity includes a bridge circuit and a power source V applied to the bridge circuit. The bridge circuit consists of a humidity sensing element 17, a temperature compensating element 18, a fixed resistor R1, and a variable resistor VR.

As an example, a method for detecting variation of the humidity by
10 the water vapor generated from food during cooking of food in a microwave oven using the absolute humidity sensor and the above circuit will be described below.

First, if the food is heated in the microwave oven, the water vapor is generated. The generated water vapor is propagated into the metal
15 shield case 23 through the hole formed therein. Thus, the water vapor is in contact with the humidity sensing element 17 and the temperature compensating element 18.

At this time, the humidity sensing element 17 has a varied resistance as the humidity is absorbed in the polyimide. However, the
20 temperature compensating element 18 does not have a varied resistance as the humidity is not absorbed in the polyimide due to the passivation film.

The resistance variation of the humidity sensing element 17 causes output variation of the bridge circuit, thereby detecting the humidity variation.

25 Accordingly, the humidity variation around the sensor can easily be detected by the absolute humidity sensor and the above circuit. The water

vapor generated from the food due to heat during cooking of food in a cooking machine such as a microwave oven is detected to apply for automatic cooking of food.

5 **Industrial Applicability**

As aforementioned, the absolute humidity sensor according to the present invention has the following advantages.

The polyimide thin film, which absorbs the humidity greater than a ceramic based humidity sensing material, is used as a humidity sensing material, and a silicon wafer is used as a substrate. Thus, an absolute humidity sensor susceptible to humidity can be fabricated and at the same time the sensor can be integrated using a silicon process. This simplifies the package process and facilitates mass production of the sensor.

15 The foregoing embodiments are merely exemplary and are not to be construed as limiting the present invention. The present teachings can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations
20 will be apparent to those skilled in the art.

What is claimed is:

1. An absolute humidity sensor comprising:
 - a silicon substrate;
 - a humidity sensing element formed on a substrate, for detecting
 - 5 humidity exposed to the air, having a variable resistance value depending on the amount of the detected humidity;
 - a temperature compensating element formed on the semiconductor, for compensating for the resistance value of the humidity sensing element; and
 - 10 a passivation film covered on the temperature compensating element, for shielding the humidity exposed to the air so as not to vary the resistance value of the temperature compensating element.
2. The absolute humidity sensor of claim 1, wherein the humidity
- 15 sensing element and the temperature compensating element include:
 - an insulating film formed on the substrate;
 - a humidity sensing film formed on the insulating film, for absorbing the humidity; and
 - an electrode formed below the humidity sensing film or over/below
 - 20 the humidity sensing film.
3. The absolute humidity sensor of claim 2, wherein the insulating film is formed of any one of SiO_2 , Si_3N_4 , and SiO_xN_y .

4. The absolute humidity sensor of claim 2, wherein the humidity sensing film is formed of polyimide.

5 5. The absolute humidity sensor of claim 2, wherein the electrode has a comb shape.

6. The absolute humidity sensor of claim 2, wherein the electrode formed only over the humidity sensing film has a comb shape.

10

7. The absolute humidity sensor of claim 1, wherein the passivation film is formed of any one of SiO_2 , Si_3N_4 , and SiO_xN_y .

8. The absolute humidity sensor of claim 1, further comprising:
15 a printed circuit board joined with a lower portion of the silicon substrate;


 a wire for electrically connecting electrodes of the humidity sensing element and the temperature compensating element with electrodes of the printed circuit board; and

20 a metal shield case formed over the printed circuit board to cover an entire surface of the printed circuit board including the humidity sensing element and the temperature compensating element.

9. The absolute humidity sensor of claim 8, wherein the metal shield
25 case has a hole for propagation of external humidity.

1/5

FIG.1

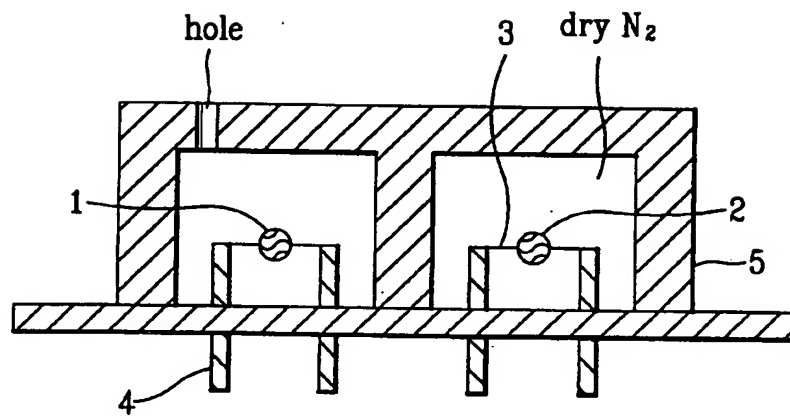

2/5

FIG. 2A


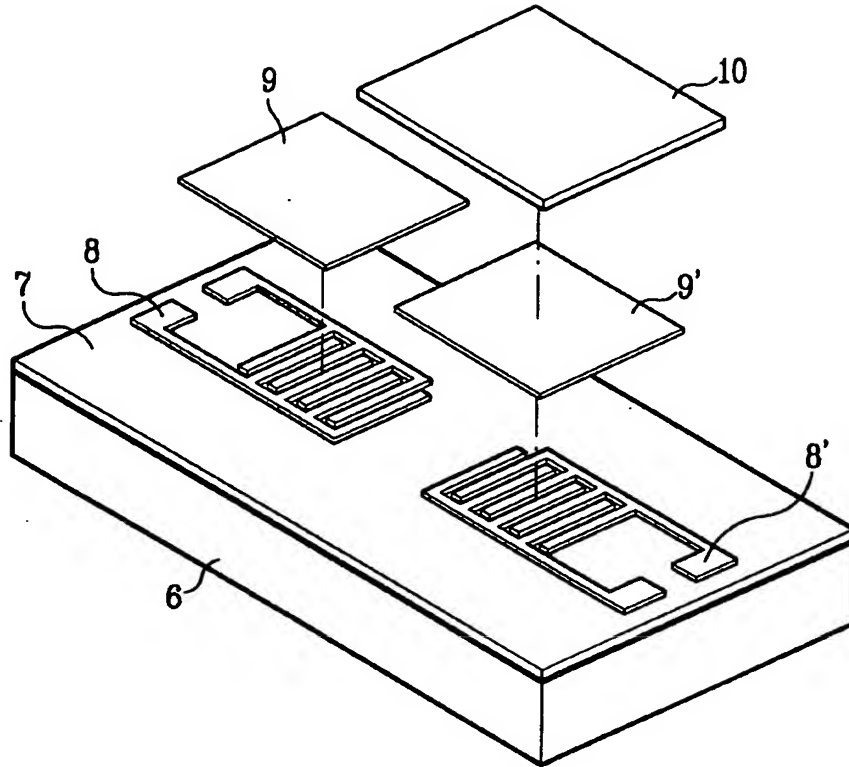


FIG. 2B

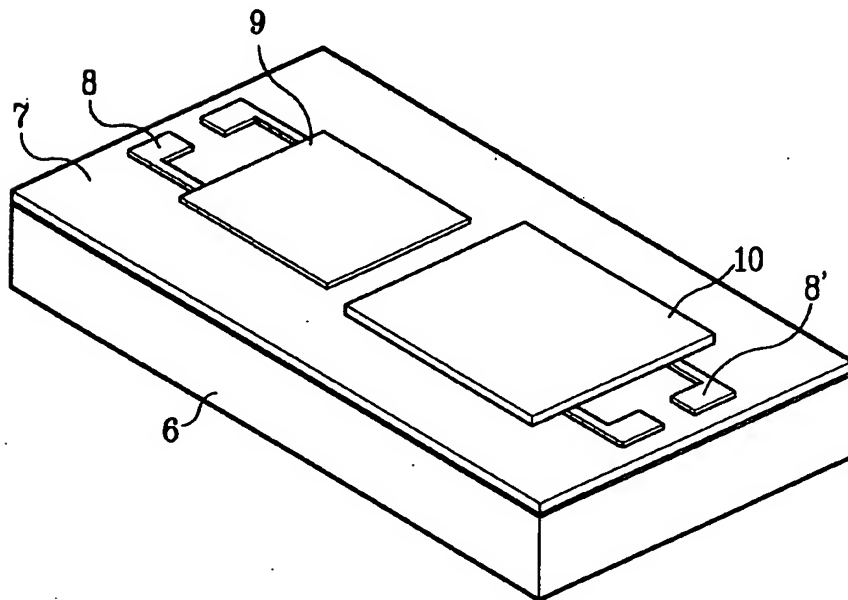

3/5

FIG. 3A


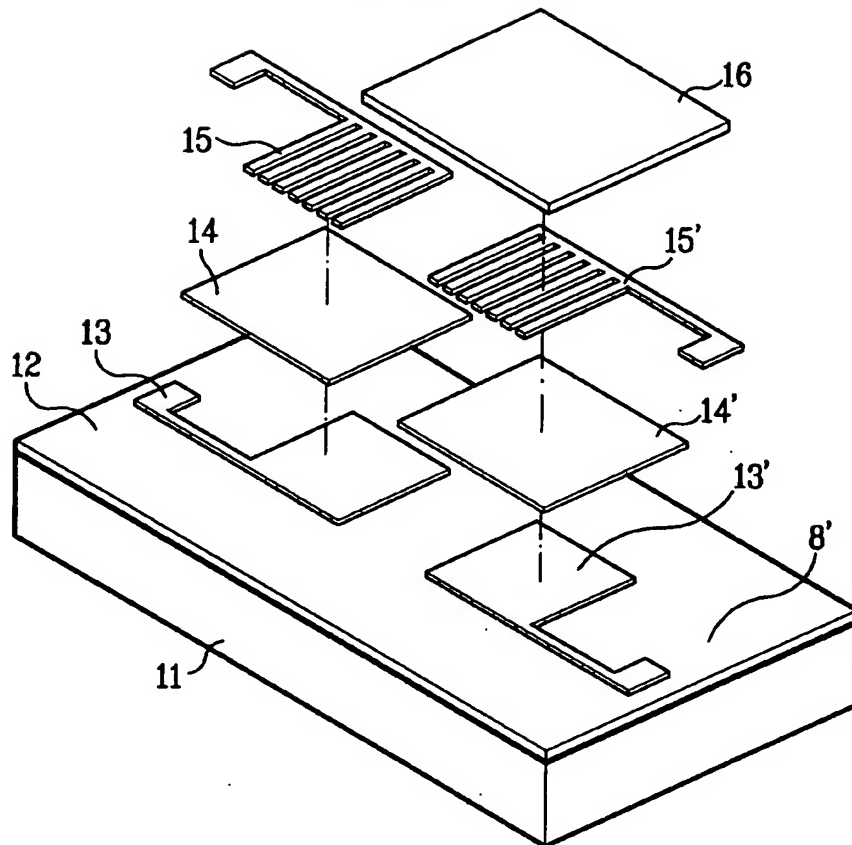


FIG. 3B

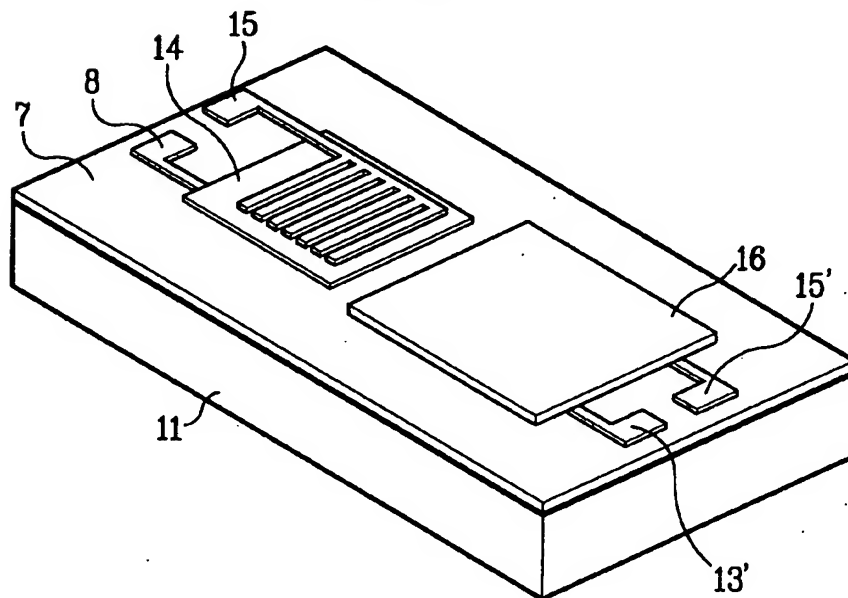

4/5

FIG. 4A



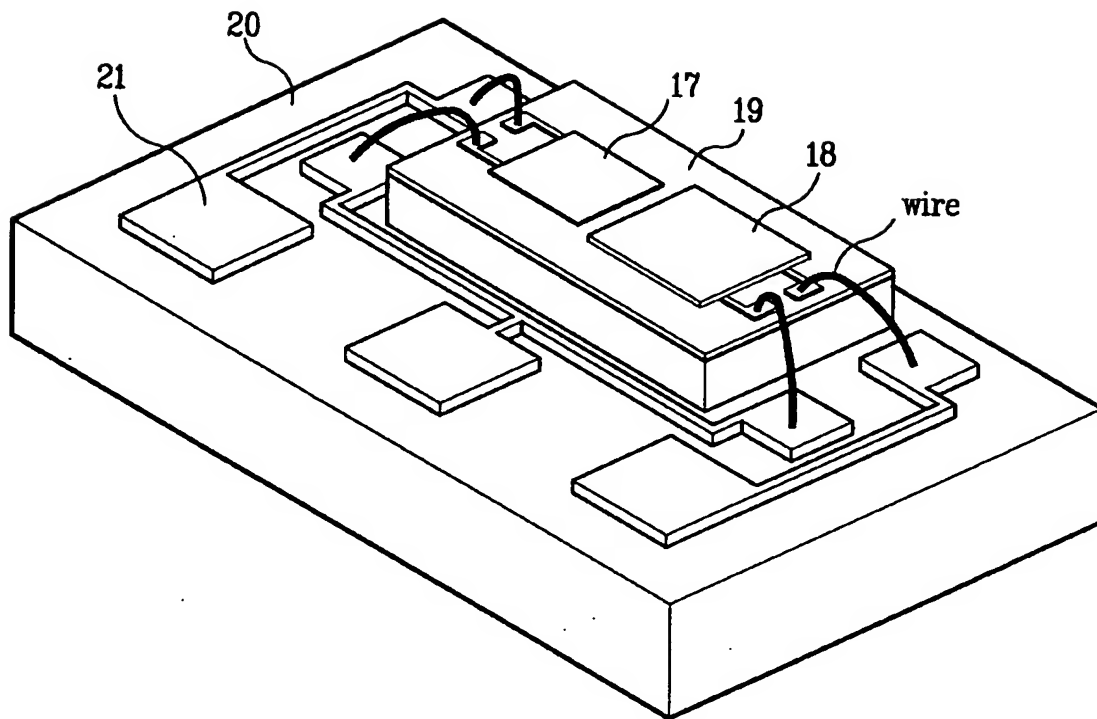


FIG. 4B

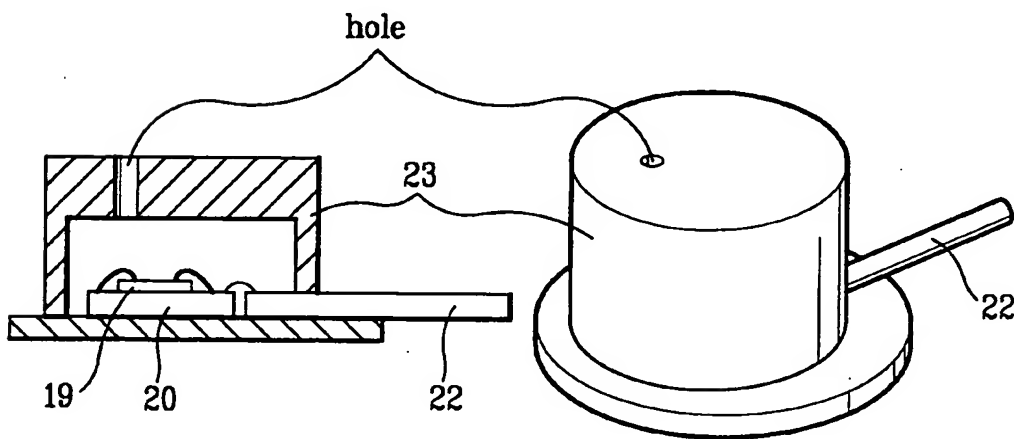

5/5

FIG. 5

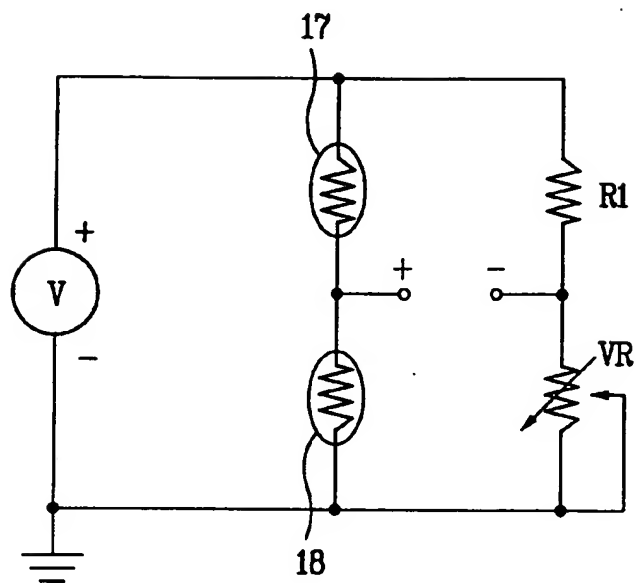

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.